



ATF III D

Automatic Transmission Fluid

Product Description


Veedol ATF III D is a premium transmission fluid designed for use in modern automatic transmission systems. It is processed from premium quality virgin base oils and performance additives.

Performance Specification

Veedol ATF III D meets the performance requirements of :
GM DEXRON III | Ford MERCON | Allison C-4 | Allison TES-389

Features & Benefits

- High and stable viscosity index for optimum performance over wide operating temperatures.
- Very High thermal/oxidation stability helps achieve longer drain interval.
- Outstanding protection against wear, corrosion and foaming.
- Optimum coefficient of friction helps achieve smooth, shudderless & consistent performance over longer life.
- Perfect compatibility with seals and non-ferrous metals
- Engineered to extend transmission life and ensure smooth operation where a DEXRON-III/ fluid is specified. Also recommended for all transmissions requiring DEXRON II or IIE, or Type A transmission fluids.
- Blended using Virgin Base Oils & proprietary performance enhancing additives.
- Caution: Do not use this product in transmissions that specify use of MERCON® V fluids or Dexron® VI fluid.

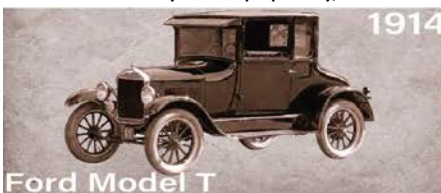



ATF III D

Automatic Transmission Fluid

Typical Properties

Test Parameters	ASTM Method	Typical Values
Density @15°C	D4052	0.85
Kinematic Viscosity @100°C, cSt	D445	6
Viscosity Index	D2270	160
Pour Point, °C	D97	-48
Flash Point (COC), °C	D92	220
Brookfield Viscosity @ - 40 'C, mPa.s	D5293	12000

*Properties mentioned above are typical only, and minor variation which do not affect the product performance, are to be expected in normal manufacturing.

