

Specialties & Other Fluids



TECHNICAL DATA SHEET

VEEDOL DOT 3

Premium Synthetic Brake Fluid

Product Description

Veedol **Dot 3** fluid is a heavy duty brake and clutch fluid for systems requiring FMVSS 116 DOT 3 to ensure safe braking in the most severe conditions.

Performance Specification

Veedol Dot 3 meets and exceeds the following performance requirements:
SAE J1703 | US FMVSS 116 DOT 3 | ISO 4925 Class 3 | JIS K2233 Class 5


Features & Benefits

- Veedol Dot 3 is suitable for use in commercial and passenger vehicles.
- Possess High boiling point that helps reduce vapor locking tendency.
- Provides excellent protection to system components against rust and corrosion.

Typical Properties

Test Parameters	ASTM Method	Typical Values
Density @ 15°C	D4052	1.067
Kinematic Viscosity @100°C, cSt	D445	1.8
Kinematic Viscosity @40°C, cSt	D445	1262
Dry Boiling Point ERBP	D1120	236
Wet Boiling Point WERBP	SAE J1703	142

*Properties mentioned above are typical only, and minor variation which do not affect the product performance, are to be expected in normal manufacturing.

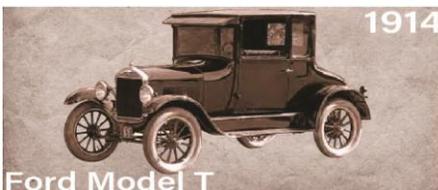

Ford Model T



Nürburgring



Africa Eco Race