

Specialties & Other Fluids



TECHNICAL DATA SHEET

AIRCOM 46

Air Compressor Oil

Product Description

Veedol **Aircom 46** is a premium quality air compressor oil featuring highly refined mineral oils and fully formulated additives to provide high performance, extended oxidation life and reduced system maintenance of rotary and reciprocating compressors.

Performance Specification

Veedol Aircom 46 meets and exceeds the following performance requirements: **DIN 51506 VD-L**

Features & Benefits

- Performance meeting or exceeding the requirements of most leading American, British, German and French turbine and R & O lubricant specifications
- Excellent rust and corrosion control
- Enhanced filterability and hence reduced downtime due to filter blockage
- Compatible with water and anti-wear hydraulic fluids
- Outstanding anti-oxidation characteristics, leading to reduced sludge formation and maximum oil life

Typical Properties


Test Parameters	ASTM Method	Typical Values
Density @15°C	D4052	0.872
Kinematic Viscosity @40°C, cSt	D445	46.0
Viscosity Index	D2270	102
Pour Point, °C	D97	-36
Flash Point (COC), °C	D92	226

*Properties mentioned above are typical only, and minor variation which do not affect the product performance, are to be expected in normal manufacturing.

www.veedol.ae

Find the best oil for your vehicle @ www.veedol.ae/lube-advisor

This information may contain proprietary, confidential or privileged data or any matter which is subject to Intellectual Property Rights owned by Veedol International Ltd.

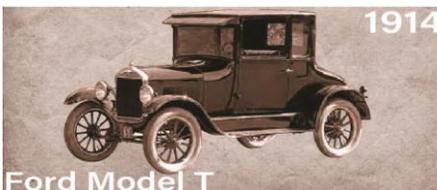

Ford Model T



Nürburgring



Africa Eco Race